TripsSource design kit

Every token and every component of the TripsSource admin, measured from its own stylesheets and written down for reuse in DCLab R&D, the DCLab product and Flowscope. Shown in the blue and light-green theme, with TripsSource's original green values beside each token.

brand-deep #1d4ed8 brand #2563eb accent #8bd346 accent-soft #e4f5d2 ink #0f1a2e

`ts-tokens.css`
Every token: 187 light values, 71 dark overrides, the fonts.

`ts-theme-blue.css`
Blue as the main colour, light green as the accent, light and dark.

`ts-components.css`
55 components and page layouts, about 880 rules, as plain .ts-* classes.

`example.html · README.md`
Every component on one page; the same spec as text.

CONTENTS

What is in here

1. Principles
what makes the look what it is

2. Setup
files, fonts, theme, naming

3. Colour
surfaces, text, brand, status, charts, dark

4. Typography
Outfit and Plus Jakarta Sans, by role

5. Shape and space
radius, spacing, control heights, shadows, layers, focus

6. The frame
sidebar, top bar, canvas, narrow screens

7. Components
21 sections: anatomy, values, states, use

8. Page patterns
overview, list, detail, form, empty

9. States, focus and motion
hover, current, disabled, invalid

10. The themes side by side
TripsSource green, blue, blue in dark

11. Using it in code
React and Next.js, Tailwind, icons

1

Principles

Eight decisions make this look what it is, in the order they matter. Follow them and a new page will look like the rest even before it uses a single component.

Calm ground, white cards 1

The page sits on a soft ground; content sits in white cards with a 1px hairline, a 22px radius and an almost invisible shadow. Heavy shadows only on overlays.

Two typefaces, two jobs 2

Outfit for what you read first: titles (38), card titles (19), big numbers (32). Plus Jakarta Sans for everything else at 12.5–15. Small labels are bold, uppercase, widely tracked.

Round everything 3

Buttons, badges, chips, tabs, pagination and search are pills. Inputs and menus 14px, cards 22px, the canvas 30px. Icon chips are rounded squares.

One accent, used as a marker 4

The bright accent appears only as the bar beside the current nav row, a selected tab's underline, the focus ring, progress and a hovered link card. Actions use the deep brand colour.

Ink for “on” 5

An open nav group, a selected pill tab, a toast, a tooltip and the save bar are deep ink with white text: the strongest emphasis there is.

Status is tinted, never loud 6

Each tone has five colours (solid, fg, bg, border, chip). Badges use chip + fg, alerts bg + border + fg; solid only for a solid badge or a danger button.

Generous, regular space 7

4 · 8 · 10 · 12 · 14 · 18 · 22 · 26 · 32. Cards pad 20, sections 18–22 apart, the page inset 16.

Three control heights 8

34, 42, 46. Tabs 38, nav rows 44, child rows 36. Everything on one line shares a height.

2

Setup

Three stylesheets and two fonts. Components are plain classes; variants, sizes and states are attributes, exactly as in TripsSource.

```
<html lang="en" data-ts-reset>   <!-- base type, box-sizing, focus ring, thin scrollbars -->
<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
<link rel="stylesheet" href="https://fonts.googleapis.com/css2?
family=Outfit:wght@400;500;600;700&family=Plus+Jakarta+Sans:wght@400;500;600;700&display=swap">
<link rel="stylesheet" href="ts-tokens.css">
<link rel="stylesheet" href="ts-theme-blue.css">   <!-- optional: blue + light green -->
<link rel="stylesheet" href="ts-components.css">

<button class="ts-button" data-variant="primary" data-size="md">Save</button>
<span class="ts-badge" data-tone="warning" data-caps>Pending</span>
```

TOPIC	RULE
Naming	`.ts-<component>` is the root, `.ts-<component>__<part>` a part. Fields: `.ts-input__field` wraps `.ts-input`.
Attributes	`data-variant`, `data-size` (sm | md | lg), `data-tone`, `data-state`, `data-invalid`, `data-caps`, `data-solid`, `data-selected`, `aria-selected`, `aria-expanded`, `aria-current`, `aria-sort`, `aria-pressed`
Theme	No attribute: the system decides. `data-ts-theme="light"` or `"dark"` on <html> (or any element) forces one.
Base	`data-ts-reset` turns on body text (Plus Jakarta Sans 13.5, antialiased), h1–h6 in Outfit, selection in accent-soft, the focus ring, thin scrollbars, and the utilities `.ts-text-*`, `.ts-weight-*`, `.ts-tracking-*`, `.ts-label-caps`, `.ts-numeric`.
Only tokens	No component uses a raw colour or size: change a token and everything follows.

3

Colour

Each token with its four values: TripsSource as shipped (light and dark), and the blue and light-green theme (light and dark). The blue theme changes colours only; every role stays the same.

Blue theme, light

ground
#e8ecf2

surface
#fff

surface-sunken
#f5f7fa

surface-muted
#eff2f6

surface-hover
#e9eef5

surface-input
#f8fafc

surface-row-hover
#f8fafc

text
#0f1a2e

text-secondary
#46526a

text-muted
#75819a

text-faint
#98a2b6

border
#e9edf3

border-strong
#dde3ec

brand
#2563eb

brand-deep
#1d4ed8

accent
#8bd346

accent-soft
#e4f5d2

ink
#0f1a2e

TripsSource, light (original)

ground
#e7e8e3

surface
#fff

surface-sunken
#f6f7f3

surface-muted
#f1f3ed

surface-hover
#edefe8

surface-input
#f8f9f5

surface-row-hover
#f8f9f5

text
#1a2418

text-secondary
#48524a

text-muted
#7c8a7f

text-faint
#9aa79d

border
#edeee8

border-strong
#e3e7dc

brand
#3f7a16

brand-deep
#24541c

accent
#8cc63f

accent-soft
#dceebb

ink
#1a2418

Surfaces, text, lines

TOKEN	TRIPSSOURCE LIGHT	TRIPSSOURCE DARK	BLUE THEME LIGHT	BLUE THEME DARK	USED FOR
`--ts-ground`	#e7e8e3	#12111f	#e8ecf2	#0b1120	The page behind everything; the sidebar sits on it
`--ts-surface`	#fff	#1b1a2b	#fff	#131b2e	Cards, panels, tables, the active nav row, menus
`--ts-surface-sunken`	#f6f7f3	#161526	#f5f7fa	#0f1626	Table header row, facts, the app canvas, pill-tab track

TOKEN	TRIPSSOURCE LIGHT	TRIPSSOURCE DARK	BLUE THEME LIGHT	BLUE THEME DARK	USED FOR
`--ts-surface-muted`	#f1f3ed	#222136	#eff2f6	#1a2338	Segment track, icon chips, avatars, chips
`--ts-surface-hover`	#edefe8	#28273d	#e9eef5	#212b42	Hover fill of rows, buttons, nav rows
`--ts-surface-input`	#f8f9f5	#1e1d30	#f8fafc	#161f33	Inputs, selects, textareas, view tiles
`--ts-surface-row-hover`	#f8f9f5	#201f32	#f8fafc	#182136	Table row hover
`--ts-text`	#1a2418	#ececf4	#0f1a2e	#e8edf7	Body text and titles
`--ts-text-secondary`	#48524a	#bab9ce	#46526a	#b4bfd4	Labels, subtitles, nav rows, table heads
`--ts-text-muted`	#7c8a7f	#9796ae	#75819a	#8f9bb3	Placeholders, meta
`--ts-text-faint`	#9aa79d	#77768f	#98a2b6	#6c7891	Nav icons at rest, breadcrumb slashes, sort icons
`--ts-border`	#edeee8	#2a2940	#e9edf3	#222c43	Card and cell hairlines
`--ts-border-strong`	#e3e7dc	#34334c	#dde3ec	#2c3752	Inputs, secondary buttons, chips, pagination

Brand, accent, ink

TOKEN	TRIPSSOURCE LIGHT	TRIPSSOURCE DARK	BLUE THEME LIGHT	BLUE THEME DARK	USED FOR
`--ts-brand`	#3f7a16	#8cc63f	#2563eb	#5b9bff	Switch on, current page (pure pagination), “today” ring
`--ts-brand-deep`	#24541c	#a9d879	#1d4ed8	#8ab8ff	Primary button, links, active nav icon, current page number
`--ts-brand-deep-hover`	#3e6837	#bde395	#1e40af	#b0d0ff	Primary button hover
`--ts-accent`	#8cc63f	#8cc63f	#8bd346	#a3e635	Nav marker bar, tab underline, focus ring, progress, checkbox fill
`--ts-accent-hover`	#7cb531	#9ed255	#78c22f	#b5ee5a	Accent button hover
`--ts-accent-soft`	#dceebb	#23301f	#e4f5d2	#1d2c19	Current child nav row, selected table row, “brand” icon chip
`--ts-accent-ink`	#152109	#c2e595	#1f3a0a	#c8f08a	Text and icons on accent-soft
`--ts-ink`	#1a2418	#2c2b43	#0f1a2e	#26324d	Open nav group, selected pill tab, toast, tooltip, save bar
`--ts-on-brand`	#fff	#0f1a0a	#fff	#0a1530	Text on brand fills
`--ts-on-accent`	#152109	#152109	#16290a	#16290a	Text on accent fills

Status tones (TripsSource light; the blue theme keeps them)

TONE	SOLID	FG	BG	BORDER	CHIP
danger	#a72e18	#8c2413	#fdf1ee	#f3cdc3	#fbe2dc
warning	#b07a16	#8a5f10	#fef8ec	#eedcb4	#fdf0da
success	#3f7a16	#2c5a10	#f4faea	#d8e9be	#edf7de
info	#2d7ff9	#1f5fbf	#f2f7fe	#cfe0fa	#e4eefb
neutral		#48524a			#f1f3ed
violet		#6b3fa0			#f1e7fb

solid a solid badge or the danger button · **fg** text on any tint · **bg** alert background · **border** alert and caps-badge border · **chip** badge, icon chip and change pill fill. `--ts-danger-deep` #8c2413 is the danger button's hover.

Status tones in dark

TONE	SOLID	FG	BG	BORDER	CHIP
danger	#c4432b	#f4a08c	#2a1520	#52242f	#3a1a26
warning	#b07a16	#ebc167	#28200f	#4d3d1c	#352b12
success	#3f7a16	#a9d879	#172116	#2f4421	#1f2d1b
info	#2d7ff9	#9dc2f8	#141c33	#273b66	#1b2748

Charts, in this order

	CHART-1	CHART-2	CHART-3	CHART-4	CHART-5	CHART-6	CHART-7	CHART-8
TripsSource light	#3f7a16	#1f5fbf	#9a6510	#6b3fa0	#147a74	#a72e18	#b8407a	#5d6b5f
TripsSource dark	#8cc63f	#6aa2f2	#e0a93e	#b48be6	#3fbfb3	#ee7a62	#e57fb0	#a2a1b8
Blue light	#2563eb	#65a30d	#9a6510	#6b3fa0	#147a74	#a72e18	#b8407a	#5d6b82
Blue dark	#6aa2f2	#a3e635	#e0a93e	#b48be6	#3fbfb3	#ee7a62	#e57fb0	#a0abc2

On ink and hero surfaces, scrims, gradients

TOKEN	VALUE	USED FOR
`--ts-on-ink-muted`	#b5c5b2	secondary text on ink (open group chevron)
`--ts-on-ink-chip`	#ffffff29	a count pill on ink
`--ts-on-deep-disc`	#ffffff2e	the icon disc inside a primary header button
`--ts-scrim-modal` / `--ts-scrim-drawer`	#1a24185c #1a241852	behind a modal / a drawer
`--ts-toast-mark-*`	#a8dc63 #7fb2fa #f2c558 #f09a85	the toast's mark per tone
`--ts-hero-green` (blue: `--ts-hero-blue`)	`linear-gradient(150deg, #3f7a16 0%, #24541c 100%)`	hero areas; also red, teal, charcoal, ink, auth gradients at 150–155°
`--ts-hatch`	`repeating-linear-gradient(135deg, #e7e9e2 0 6px, #f3f4ef 6px 12px)`	"no data" or disabled areas

4

Typography

Outfit for titles and figures, Plus Jakarta Sans for all running text and controls. Every row below is set in the real font at the real size.

ROLE	SAMPLE	FONT · SIZE · WEIGHT · TRACKING · LINE HEIGHT
Page title	**Bookings overview**	Outfit `38px · 600 · -.025em · 1.05`
Big figure	**2,631**	Outfit `32px · 600 · -.025em · 1.1`
h2	**Section heading**	Outfit `26px · 600 · -.025em · 1.2`
Modal title	**Run again on a copy?**	Outfit `24px · 600 · 0 · 1.2`
Brand name	**Journey Studio**	Outfit `20px · 600 · -.01em · 1.2`
Card title	**Recent runs**	Outfit `19px · 600 · 0 · 1.3`
Panel title	Tested models	Plus Jakarta Sans `18px · 600 · 0 · 1.3`
Sub-title	**What it is given**	Outfit `15px · 600 · 0 · 1.35`
Reading body	A paragraph of running text sits at fifteen pixels.	Plus Jakarta Sans `15px · 400 · 0 · 1.65`
Control, nav row	Dashboard · Save changes	Plus Jakarta Sans `14px · 500 · 0 · 1.4`
UI body	The default size of every table cell and line of UI.	Plus Jakarta Sans `13.5px · 400 · 0 · 1.5`
Small, hints	We never share it.	Plus Jakarta Sans `12.5px · 400 · 0 · 1.4`
Badge	Completed	Plus Jakarta Sans `12px · 500 · 0 · 1.4`
Caps label	BOOKINGS TODAY	Plus Jakarta Sans `11.5px · 700 · .12em · 1.4`
Sidebar group label	MENU	Plus Jakarta Sans `11px · 600 · .12em · 1.4`

The type scale

TOKEN	PX	TOKEN	PX	TOKEN	PX
`text-2xs`	10.5px	`text-11`	11px	`text-xs`	11.5px
`text-12`	12px	`text-sm`	12.5px	`text-13`	13px
`text-base`	13.5px	`text-md`	14px	`text-15`	15px

TOKEN	PX	TOKEN	PX	TOKEN	PX
`text-lg`	15.5px	`text-17`	17px	`text-xl`	18px
`text-19`	19px	`text-20`	20px	`text-2xl`	21px
`text-24`	24px	`text-3xl`	26px	`text-28`	28px
`text-4xl`	32px	`text-34`	34px	`text-5xl`	38px
`text-42`	42px				

Rules. Outfit only for titles and numbers. Numbers in tiles and tables use tabular figures (`.ts-numeric`). Subtitles and empty-state text stay under 70 characters a line. Titles are sentence case; caps labels are one to three words. Weights: 400 regular, 500 medium, 600 semibold, 700 bold. Tracking: tight -.025em (titles), caps .12em, micro .06em (table heads).

5

Shape and space

Radii, the spacing scale, control heights, shadows, layers and focus. All are the same in every theme (only shadow tints change).

Radius

pill
`99px`
Buttons, badges, chips, tabs, search, avatars, page buttons

xl
`30px`
The app canvas

lg
`24px`
Dashboard link cards

md
`22px`
Alerts, segment track

card
`22px`
Cards, panels, stat tiles

modal
`26px`
Modal, drawer, sign-in card

20
`20px`
Save bar

16
`16px`
Facts, view tiles and rows, bulk bar

sm
`14px`
Inputs, menus, popovers, table head ends, icon chips

nav
`14px`
Sidebar rows

12
`12px`
Brand mark

10
`10px`
Child nav rows

xs
`8px`
Menu items, tooltips, kbd

Spacing

`space-1`	4px
`space-2`	8px
`space-3`	10px
`space-4`	12px
`space-5`	14px
`space-6`	18px
`space-7`	22px
`space-8`	26px
`space-9`	32px

LAYOUT SIZE	PX
`page-inset`	16px
`sidebar-width`	246px
`sidebar-padding-block`	20px
`card-padding`	20px
`modal-padding`	24px
`popover-width`	320px

Control heights

control-xs
`30px`
Colour-mode segments, save-bar icon

control-sm
`34px`
Small buttons and inputs, page buttons, segments, avatar sm

control-tab
`38px`
Pill tabs

control
`42px`
Default buttons and inputs, underline tabs, avatar md

nav-row-child
`36px`
Sidebar child rows

nav-row
`44px`
Sidebar rows

control-lg
`46px`
Header buttons, icon chips, top-bar search and round buttons

Layers

LAYOUT SIZE	PX
`drawer-width`	450px
`modal-width-sm`	400px
`modal-width-md`	520px
`modal-width-lg`	720px
`modal-width-xl`	1200px

LAYER	Z-INDEX
`z-modal-backdrop`	1100
`z-modal`	1110
`z-menu`	1120
`z-tooltip`	1130
`z-toast`	1140

Focus

TOKEN	VALUE
`focus-ring`	2px solid accent (outline)
`focus-offset`	2px
`focus-contour`	0 0 0 6px brand-deep (box-shadow, so the ring reads on any fill)
`focus-contour-inset`	the same, inset, inside lists

Shadows

shadow-card
`0 1px 2px #1a24180a`
Cards, panels, menus

shadow-nav-active
`0 2px 8px #1a24180f`
The current nav row

shadow-segment-active
`0 2px 6px #1a241814`
The checked segment

shadow-toast-v3
`0 16px 40px #1a241847`
Toast


shadow-drawer
`0 20px 60px #1a24183d`
Drawer

shadow-modal
`0 24px 70px #1a24184d`
Modal

6

The frame

Every page sits in the same frame: the sidebar on the ground, the top bar, and the page on a rounded canvas. (Rebuilt from the screenshots; drawn here at 62%.)

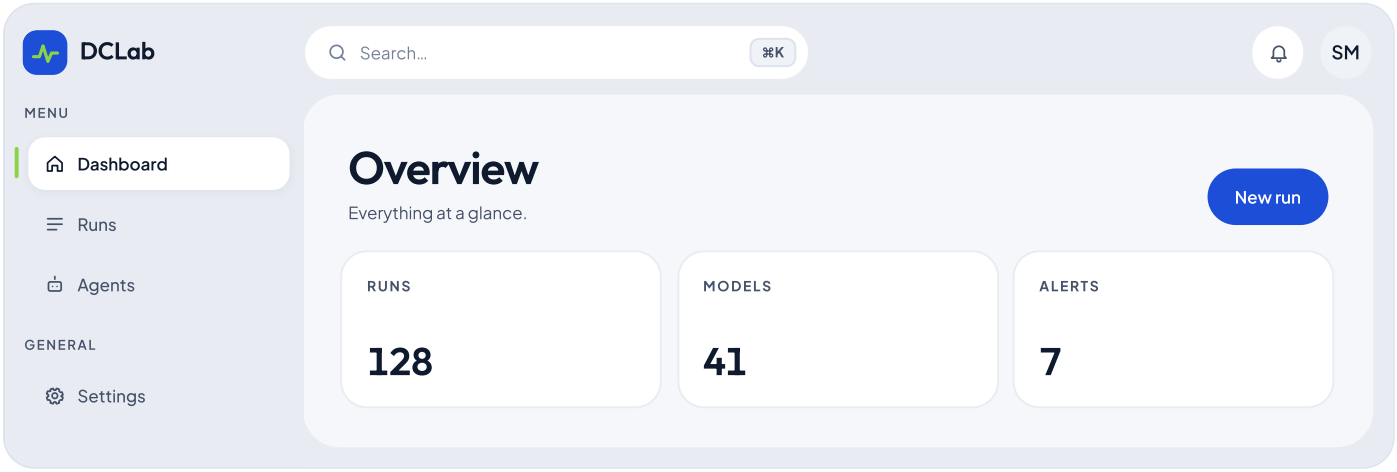

PART	VALUES
`.ts-app`	grid: 246px sidebar + the rest; ground background; Plus Jakarta Sans 13.5 / 1.5
`.ts-app__sidebar`	sticky, full height, scrolls on its own; 20px top and bottom, thin scrollbar; `__sidebar-foot` at the bottom
`.ts-app__main`	16px page inset (none on the sidebar side); top bar, then the canvas, 12px apart
`.ts-app__canvas`	surface-sunken, radius 30, 32px padding (22 / 14 on phones); sections 22px apart
Below 64rem	the sidebar is a drawer: fixed, radius 26 on its open side, drawer shadow over the drawer scrim; `data-drawer="open"` on `.ts-app` shows it; the menu button appears
Below 40rem	search becomes a round button, the user chip its avatar, the page title 32px
Content grids	container queries, not the viewport: view 2fr / 1fr from 1000px, detail 1.55fr / 1fr from 860px, form nav from 960px


7

Components

Each component drawn by `ts-components.css` itself, then its parts (class names), its values, and how to use it. Sizes are in CSS pixels.

Sidebar

Navigation in groups on the page ground: the brand, caps group labels (MENU, GENERAL), rows with an icon, groups that open, child rows, and a marker on the current page.

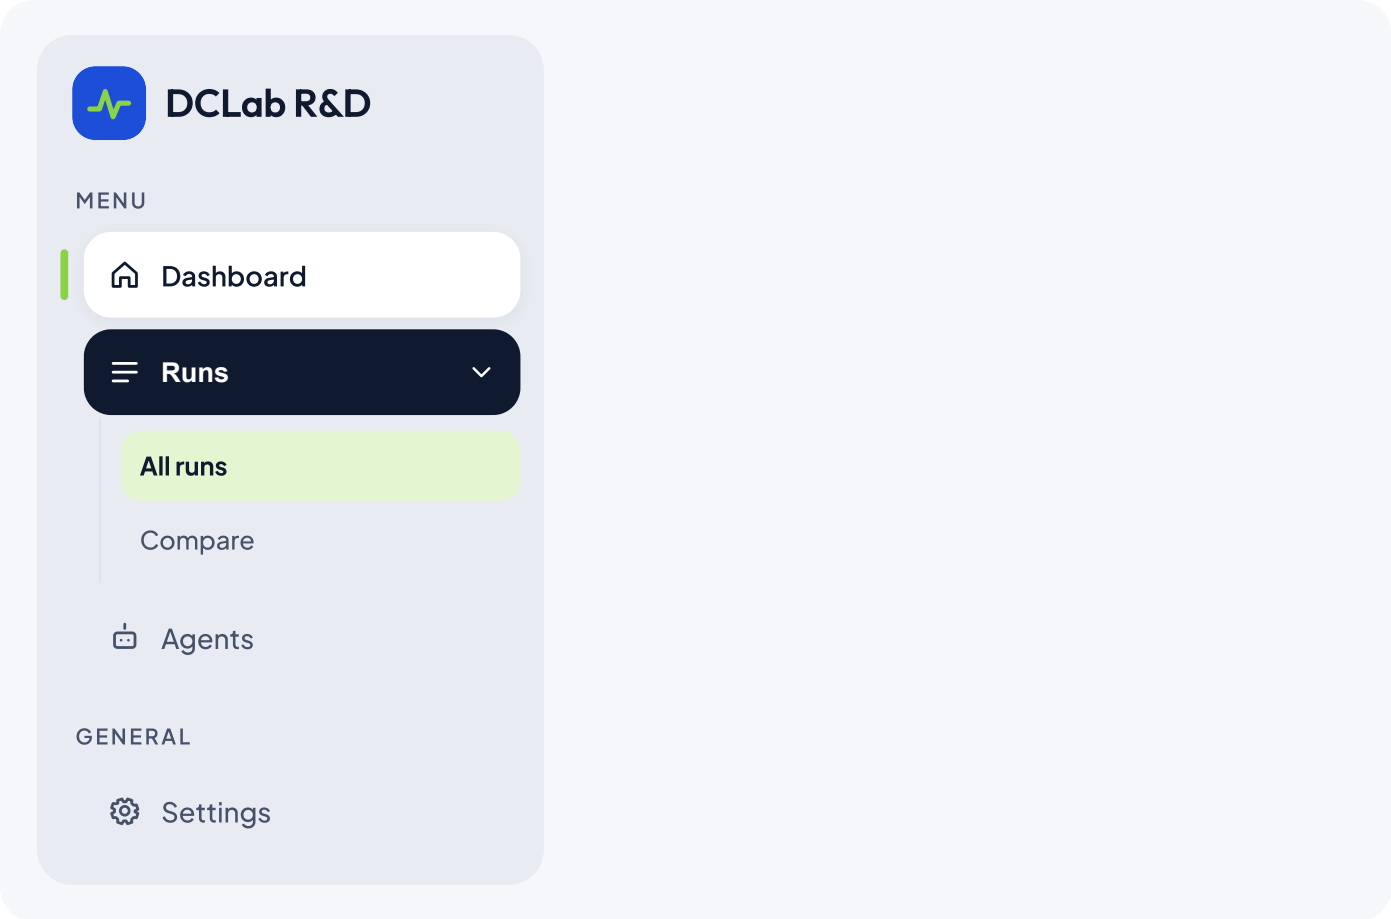

PART	CLASS
Brand link, mark, name	`.ts-sidebar__brand`, `__brand-mark`, `__brand-name`
Nav, section, group label	`__nav`, `__nav-section`, `__nav-group-label`
List and items	`__nav-list`, `__nav-direct-item`, `__nav-group-item`, `__nav-child-item`
Row, icon, label	`__nav-row`, `__nav-row-icon`, `__nav-row-label`
Row states	`__nav-row-active`, `__nav-row-current`, `__nav-row-group`, `__nav-row-child`
Children, chevron	`__nav-children`, `__nav-chevron`, `__nav-chevron-open`


PROPERTY	VALUE
Width / padding	246px; 20px top and bottom
Row	44px, radius 14, 14px medium, text-secondary; icon 18px text-faint
Hover	surface-hover fill, text colour
Current row	white surface, nav-active shadow, semibold, icon brand-deep, 4×26px accent pill 12px to its left
Open group	ink fill, white text, accent icon, chevron on-ink-muted
Child row	36px, radius 10, 13px; current: accent-soft fill, bold
Children list	1px border-strong line on the left, indented 20px
Group label	11px semibold uppercase, tracking .12em

PROPERTY	VALUE
Brand	mark 38px radius 12; name Outfit 20 semibold; 22px above the nav

- One row per page; group what belongs together and keep groups to six or fewer children.
- The group holding the current page opens by itself.
- Below 64rem the sidebar becomes a drawer opened from the top bar.

Top bar

Above the canvas: the menu button (narrow screens), a pill search with its shortcut, then round buttons and the user chip on the right. (Rebuilt from the screenshots.)

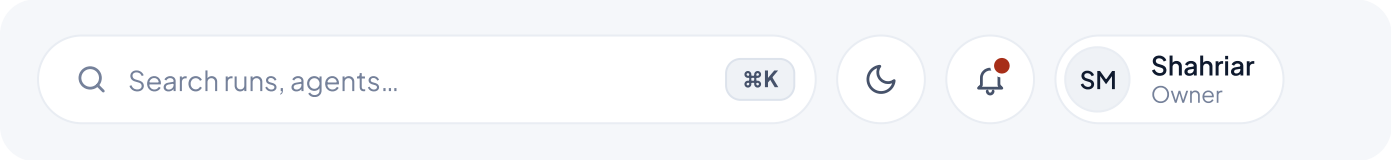


PART	CLASS
Bar, end group	`.ts-topbar` , `__end` , `__menu`
Search, key hint	`.ts-topbar__search` , `.ts-kbd`
Round button, alert dot	`.ts-icon-button[data-size=lg]` , `.ts-topbar__dot`
User chip	`.ts-user-chip` , `__name` , `__role`

PROPERTY	VALUE
Height	46px (control-lg)
Search	pill, up to 420px, white, hairline border, text-muted 14px; ⌘K in an 11.5px bold kbd
Round buttons	46px, white, hairline border, hover surface-hover
User chip	pill 46px, avatar 34px, name 13.5 semibold, role 11.5 muted
Below 40rem	search becomes a round button, the chip its avatar

Page header

The top of every page: breadcrumbs, a big title, one line under it, and actions aligned to the title's bottom.

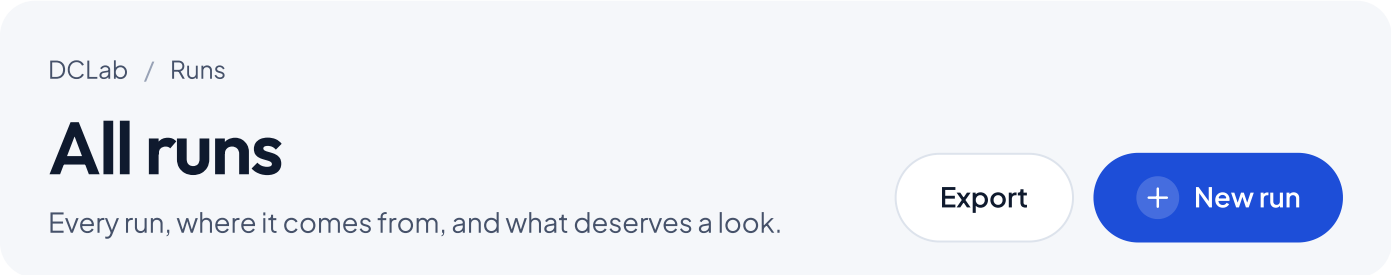

PART	CLASS
Header	`.ts-page-header`
Breadcrumbs	`__breadcrumbs` , `__crumbs` , `__crumb` , `__crumb-link` , `__current`
Title block	`__lead` , `__title` , `__subtitle`
Actions	`__actions`


PROPERTY	VALUE
Title	Outfit 38 / 1.05, semibold, -.025em
Subtitle	14px text-secondary, max 70ch, 8px under the title
Breadcrumbs	12.5px text-secondary, faint "/" between, current in text colour
Header buttons	always 46px, 22px side padding; secondary gets a 1.5px border; the primary's icon sits in a 22px white-alpha disc

PROPERTY	VALUE
Gaps	18px between columns, 12px between rows

- One primary action per page, at the right end.
- Titles are sentence case and short; the subtitle says what the page is for.

Button

Pill buttons in five variants and three sizes. One primary per view.

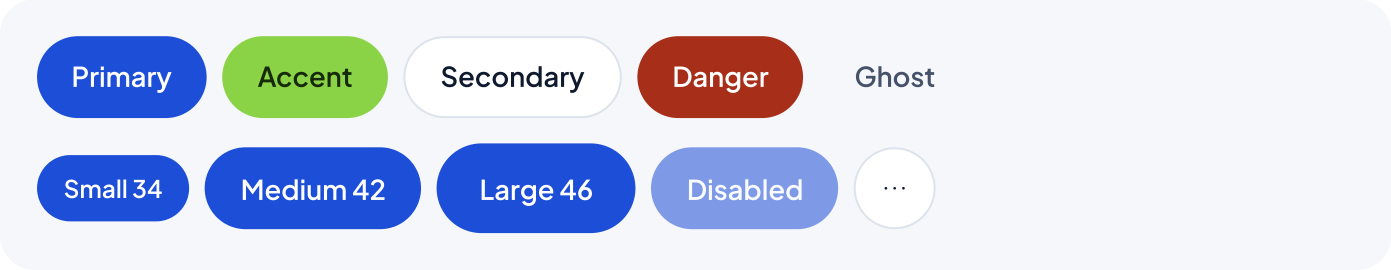

PART	CLASS
Button (a or button)	`.ts-button[data-variant][data-size]`
Inside	`__content` , `__icon` , `__label` , `__spinner`
Shapes	`__icon-only` , `__full-width`
States	`disabled` , `aria-disabled=true` , `data-state=loading`

PROPERTY	VALUE
primary	brand-deep fill, on-brand text; hover brand-deep-hover
accent	accent fill, on-accent text; hover accent-hover
secondary	white, 1px border-strong, text; hover surface-hover
danger	danger-solid, white; hover danger-deep
ghost	transparent, text-secondary; hover surface-hover, text
Sizes (height / padding / font)	sm 34 / 14 / 12.5 · md 42 / 18 / 14 · lg 46 / 22 / 14
Shape	pill radius, semibold, 8px between icon and label
Disabled	opacity .55, no hover
Loading	content hidden, a 18px ring in the middle

- Primary for the main action, secondary for the rest, ghost inside dense rows.
- Accent only for one highlighted call to action; danger only to confirm a destructive step.

Icon button, text button, link

Small actions: a round icon button, an underline-on-hover text button, and an inline link.




PART	CLASS
Icon button	`.ts-icon-button[data-size]`
Text button	`.ts-text-button[data-size]`
Link	`.ts-link`

PROPERTY	VALUE
Icon button	round, transparent, text-secondary; hover surface-hover + text; sm 34 / md 42 / lg 46
Text button	pill, no fill, medium; underline on hover; same heights
Link	brand-deep, semibold, 12.5px; underline on hover

- Every icon button needs an aria-label.

Badge

A status in a pill: soft by default, caps for a record's status, solid for the one that must stand out.

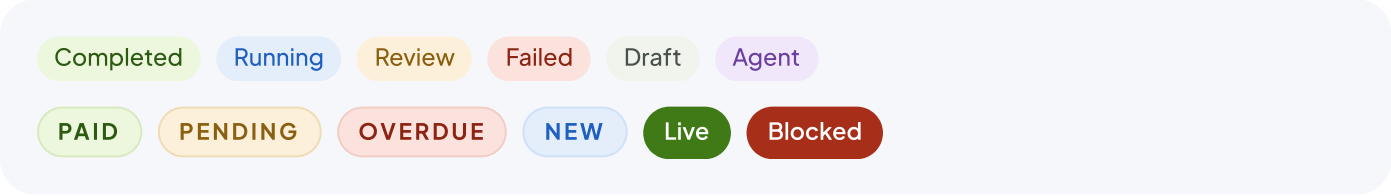

PART	CLASS
Badge	`.ts-badge[data-tone]`, `[data-caps]`, `[data-solid]`

PROPERTY	VALUE
Soft	pill, 12px medium, 2 × 8 padding, tone chip fill + tone fg text
Caps	11.5px bold uppercase, .12em, 4 × 10 padding, tone border
Solid	tone solid fill, white, semibold (success, danger)
Tones	success, info, warning, danger, neutral, violet

Chip

An active filter or a removable tag.




PART	CLASS
Chip	`.ts-chip`, `__label`, `__remove-button`

PROPERTY	VALUE
Look	pill, 1px border-strong, surface-muted, 12.5px, 8 × 10 padding
Remove	26px round, text-secondary; hover surface-hover + text

Stat tile

A KPI: a caps label, a big number, an icon chip, and how it changed. Lay four in a row.

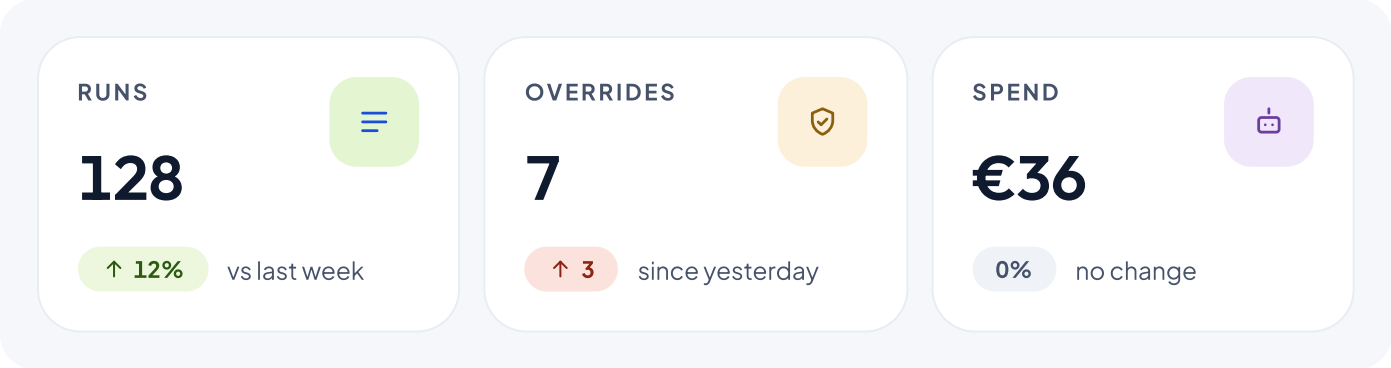

PART	CLASS
Tile	`.ts-stat-tile`, `__head`, `__lead`
Label, figure	`__label`, `__figure`
Icon chip	`__icon-chip[data-icon-tone]`
Change	`__change[data-tone]`, `__change-value`, `__change-caption`
Grid	`.ts-stat-grid`

PROPERTY	VALUE
Card	20px padding, radius 22, hairline border, white, no shadow
Label	11.5px bold caps, .12em, text-secondary
Figure	Outfit 32 semibold, tabular, -.025em, 18px under the label
Icon chip	46px, radius 14; tones brand (accent-soft + brand-deep), success, danger, warning, info, violet
Change pill	11.5px bold; positive = success chip, negative = danger chip, none = muted; caption 12.5 secondary
Grid	auto-fit, 13rem minimum, 12px gap

Needs attention card

What went wrong or waits for someone: a coloured edge, a caps label, a count and one line. (Rebuilt from the screenshots.)




PART	CLASS
Card	`.ts-attention[data-tone]`, `__label`, `__count`, `__text`
Grid	`.ts-attention-grid`

PROPERTY	VALUE
Card	white, hairline border, radius 22, 20px padding (+4 at the edge)
Edge	4px, tone solid (danger, warning, info, success)
Count	Outfit 28 semibold tabular
Text	12.5px secondary
Grid	auto-fit, 16rem minimum, 12px gap

- Show only cards with something in them; when nothing is wrong, one “All clear” card.

Panel and view card

The general container, and the card of a detail view with its tiles and rows.

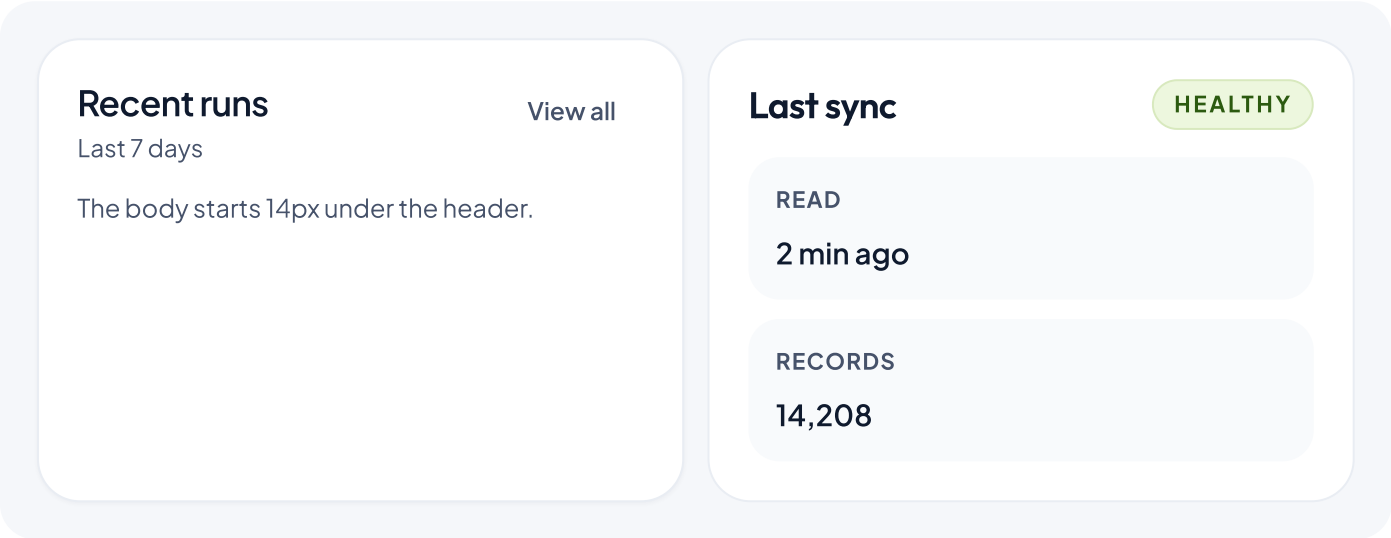


PART	CLASS
Panel	`.ts-panel`, `__header`, `__heading`, `__title`, `__subtitle`, `__actions`, `__body`
View card	`.ts-view__card`, `__card-head`, `__card-title`, `__sub-title`
View parts	`__label`, `__text`, `__body`, `__tiles`, `__tile`, `__tile-value`, `__rows`, `__row`, `__field-box`, `__divided`
Layout	`.ts-view`, `__layout`, `__main`, `__rail`

PROPERTY	VALUE
Panel	20px padding, radius 22, hairline border, card shadow; title 18 semibold; subtitle 12.5 secondary
View card	same box, no shadow; title Outfit 19 semibold; parts 14px apart
Tiles, rows	input fill, radius 16, 14px padding
Reading text	15 / 1.65, max 78ch
Layout	one column, then 2fr / 1fr at a 1000px container width

Tabs

Underline tabs for a page's sections; pill tabs for switching what a list shows.

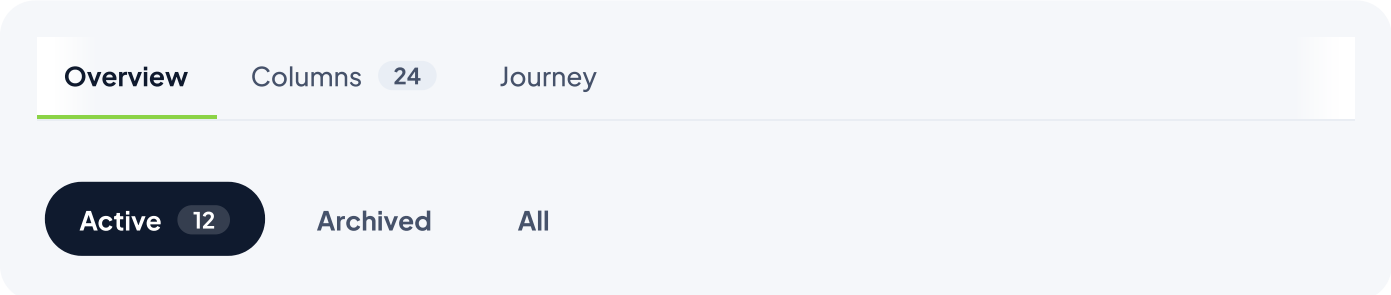


PART	CLASS
Tabs	`.ts-tabs[data-orientation]`, `__list[data-variant]`, `__tab[aria-selected]`, `__count`, `__panel`

PROPERTY	VALUE
Underline	42px tabs, 14px padding, 13.5 medium, text-secondary; list has a 1px hairline under it
Underline selected	2.5px accent underline, text colour, bold

PROPERTY	VALUE
Pill	sunken track with 4px padding; tabs 38px, 18px padding, bold
Pill selected	ink fill, white text; count on-ink-chip
Count	pill, hover fill, 11.5 bold
Overflow	scrolls with fading edges

Segmented control

Two to five options that change a view in place (Day / Week / Month). Built on radio inputs.

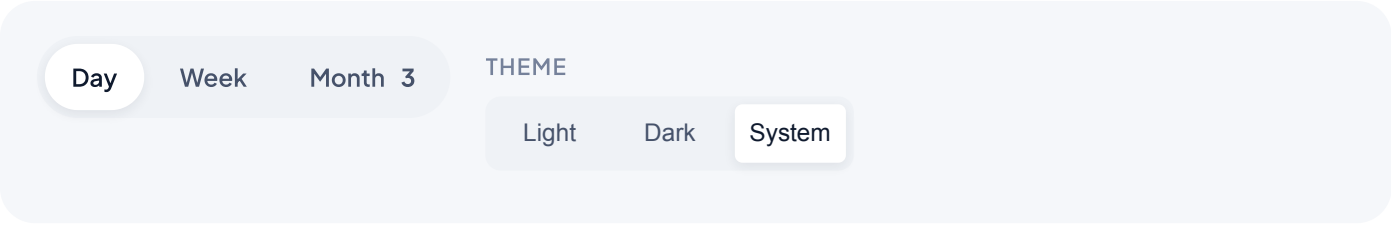

PART	CLASS
Segmented control	`.ts-segmented-control__group`, `__segment`, `__input`, `__count`
Colour mode	`.ts-colour-mode__choice`, `__choice-label`, `__segments`, `__segment[aria-pressed]`

PROPERTY	VALUE
Track	surface-muted, radius 22, 4px padding
Segment	pill, ≥34px, 14px padding, 12.5 semibold, text-secondary
Checked	white fill, segment shadow, text colour
Colour mode	caps label over three equal 30px segments on an 8px-radius track

Data table

A table in a white frame: a rounded sunken header bar with caps labels, hairline rows, row hover and selection, sorting, row actions and a footer with pagination.

STARTED	RUN	SCORE	STATUS	
19 Oct	**churn-q3**	0.871	Completed	···
18 Oct	**fraud-cards**	—	Failed	···
17 Oct	**demand-week**	0.804	Running	···

1 selected Page 1 of 32

1 2 3 … 32

PART	CLASS
Table	`.ts-data-table`, `__frame`, `__scroller`, `__table`
Head	`__header-cell[aria-sort]`, `__sort-button`, `__sort-icon`, `__header-actions`
Body	`__body`, `__cell`, `__cell-actions`, `tr[data-selected]`
Menu, notice	`__menu`, `__menu-item`, `__notice-cell`
Footer	`.ts-table-footer`, `__selection-status`, `__page-status`, `__pages`, `__page-number[aria-current]`, `__page-gap`

PROPERTY	VALUE
Frame	white, radius 14, clips the table
Header cell	12 × 14 padding, surface-sunken, 11.5 bold caps .06em, text-secondary, sticky; first and last cells rounded 14 on their outer side
Cell	12 × 14 padding, 13.5px, 1px hairline under each row
Hover / selected	surface-row-hover / accent-soft
Sort	icon faint until sorted, then text colour
Page button	34px pill, 1px border-strong, 12.5 semibold; current brand-deep fill, on-brand text

- Numbers right where they compare; use .ts-numeric for tabular figures.
- An empty or failed table shows an empty state inside a notice cell, never a blank box.

Fields: text, search, select, textarea

One anatomy for every field: a bold label, an optional hint, the box, and an error line.

Run name

Shown in the run list.

churn-q3

Owner email

owner@

⚠ Enter a full email address

Search

Find a run

Model

Gradient boosting

Run id

run_8f2c

Note

What changed?

PART	CLASS
Text	`.ts-input__field[data-size][data-state]`, `__label`, `__hint`, `__control`, `.ts-input`, `__adornment`, `__meta`, `__error`, `__count`
Search	`.ts-search-field__field`, `__input`, `__adornment`, `__clear-button`
Select	`.ts-select__field`, `.ts-select`, `__caret`
Textarea	`.ts-textarea__field`, `.ts-textarea`

PROPERTY	VALUE
Box	1px border-strong, radius 14, surface-input, 14px text (12.5 sm)
Heights / side padding	sm 34 / 14 · md 42 / 18 · lg 46 / 22; textarea 12px top and bottom
Label	bold 12.5 (12 sm), 8px above the box
Hint	12.5 text-secondary
Hover (rest)	surface-hover fill
Read-only	surface-muted fill
Disabled	opacity .55, not-allowed

PROPERTY	VALUE
Invalid	danger-fg border, error line in danger-fg with an icon
Adornment	icon 12px in from the start; the text is padded past it

Checkbox, radio, switch

Drawn controls over hidden native inputs, each with a 26px hit area.

Include samples · Off · Random · By time · Alerts on

Off

PART	CLASS
Checkbox	`.ts-checkbox__checkable[data-size]`, `__row`, `__input`, `__box`, `__glyph-check`, `__glyph-minus`, `__label-text`, `__description`
Radio	`.ts-radio__group`, `__legend`, `__options[data-orientation]`, `__choice`, `__circle`, `__dot`
Switch	`.ts-switch__checkable[data-tone]`, `__input`, `__track`, `__thumb`

PROPERTY	VALUE
Checkbox	18px box (14 sm, 22 lg), radius 3/16 of its size, border-strong, white; checked: accent fill, brand border, glyph on-accent
Radio	18px circle; checked: a brand dot half its size
Switch	track 2× its height (44 × 22 md), surface-muted, border-strong; thumb text-muted; on: brand track, on-brand thumb; danger tone uses danger-solid
Label	14px medium (12.5 sm); description 12.5 secondary
Motion	.15s on track and thumb

Alert

A message on a page: success, warning, danger, or a neutral note. The compact note fits inside forms.

Sync finished

128 runs read.

Two runs need a look

They stopped before a model was chosen.

Open them

The helper is not running

Start it with npm run helper.

Read only

Nothing in R&D is ever written.


A compact note, for inside a form.

PART	CLASS
Banner	`.ts-alert.ts-alert__banner[data-tone]`, `__mark`, `__content`, `__title-row`, `__title`, `__body`, `__actions`, `__dismiss-button`
Note	`.ts-alert.ts-alert__note`, `__note-mark`, `__note-text`, `__note-action`

PROPERTY	VALUE
Banner	radius 22, 14 × 18 padding, tone bg + border, fg text
Title / body	15.5 semibold / 12.5 at 1.5
Info tone	neutral: sunken fill, border-strong, text colour
Note	radius 14, 10 × 12 padding, one line
Dismiss	26px round, hover the tone chip

Empty state, avatar, loader

What shows where content would be; a person; something loading.

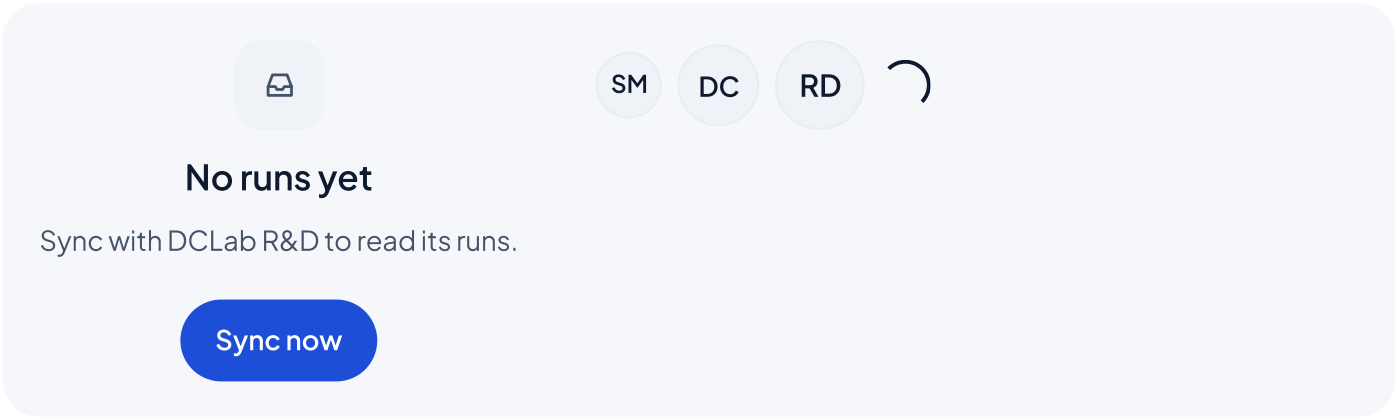


PART	CLASS
Empty state	`.ts-empty-state[data-tone]`, `__glyph-chip`, `__title`, `__body`, `__action`
Avatar	`.ts-avatar[data-size]`, `__image`, `__initials`
Loader	`.ts-loader`, `__ring`, `__skeleton`, `__splash`, `__progress`

PROPERTY	VALUE
Empty state	centred, 12px gaps; glyph chip 46px radius 14 muted; title 18 semibold; body 14 secondary ≤70ch; danger tone for load errors
Avatar	round, hairline border, muted fill, semibold initials; sm 34 / md 42 / lg 46
Loader ring	26px, 2px, two sides coloured, spins in .75s; pulses with reduced motion
Skeleton	a sweeping sheen at the size of the content
Splash	ground, 46px logo, Outfit 24 quote, 3px accent progress bar

Overlays: modal, toast, tooltip, popover, menu

Everything that floats above the page.

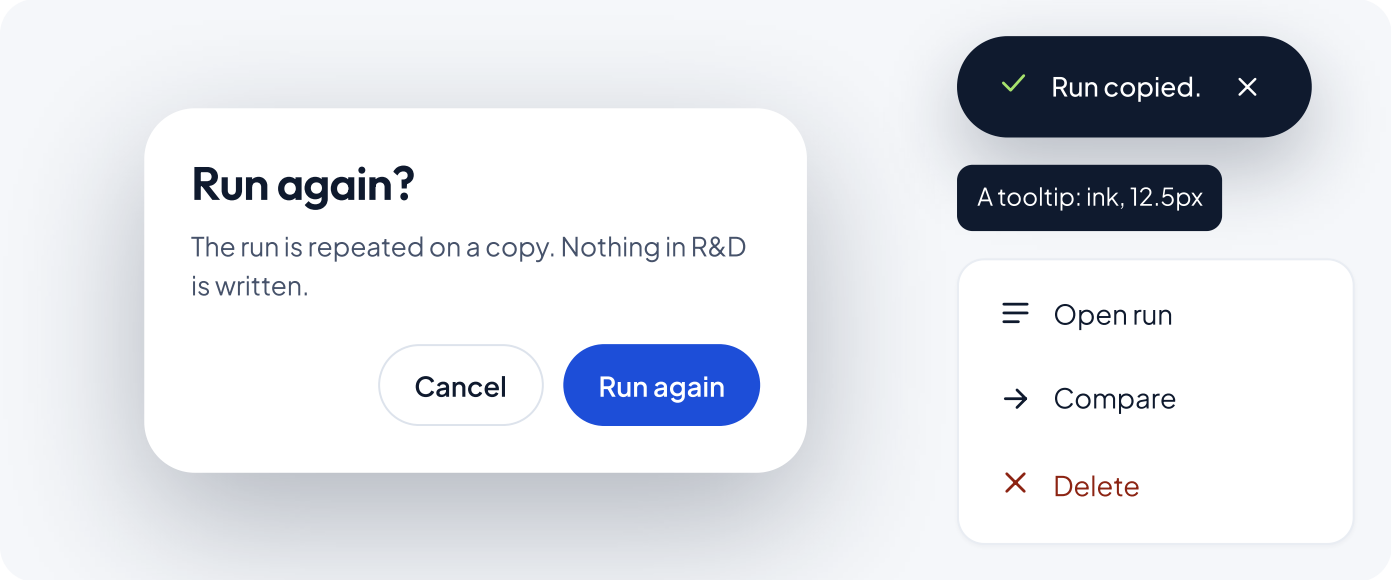


PART	CLASS
Modal	`.ts-modal__backdrop`, `__position`, `__panel[data-size]`, `__title`, `__close-button`, `__body`, `__footer`
Toast	`.ts-toast[data-tone]`, `__mark`, `__content`, `__dismiss-button`
Tooltip, info term	`.ts-tooltip`, `.ts-info-term__term`, `__mark`
Popover	`.ts-popover__panel`, `__title`
Menu	`.ts-menu-button`, `__menu`, `__item[data-tone]`, `__check-slot`

PROPERTY	VALUE
Modal	widths sm 400 / md 520 / lg 720 / xl 1200; 24px padding; radius 26; modal shadow; scrim-modal behind
Modal title / body	Outfit 24 semibold / 13.5 at 1.5 secondary, scrolls
Modal footer	buttons at the right, 20px above; stacked full width under 480px
Toast	ink pill, white 13.5 medium, 13 × 20 padding, coloured mark per tone
Tooltip	ink, white 12.5, 8 × 10 padding, radius 8, ≤400px
Popover	320px, 20px padding, radius 14, hairline border, card shadow
Menu	≥204px, 8px padding, radius 14; items 10 × 12, radius 8, 14px; focused item hover fill; danger items red
Layers	backdrop 1100 · modal 1110 · menu 1120 · tooltip 1130 · toast 1140

Filter bar, list page, save bar

The parts around a list: its filters, its toolbar and bulk actions, and the bar that saves a form.

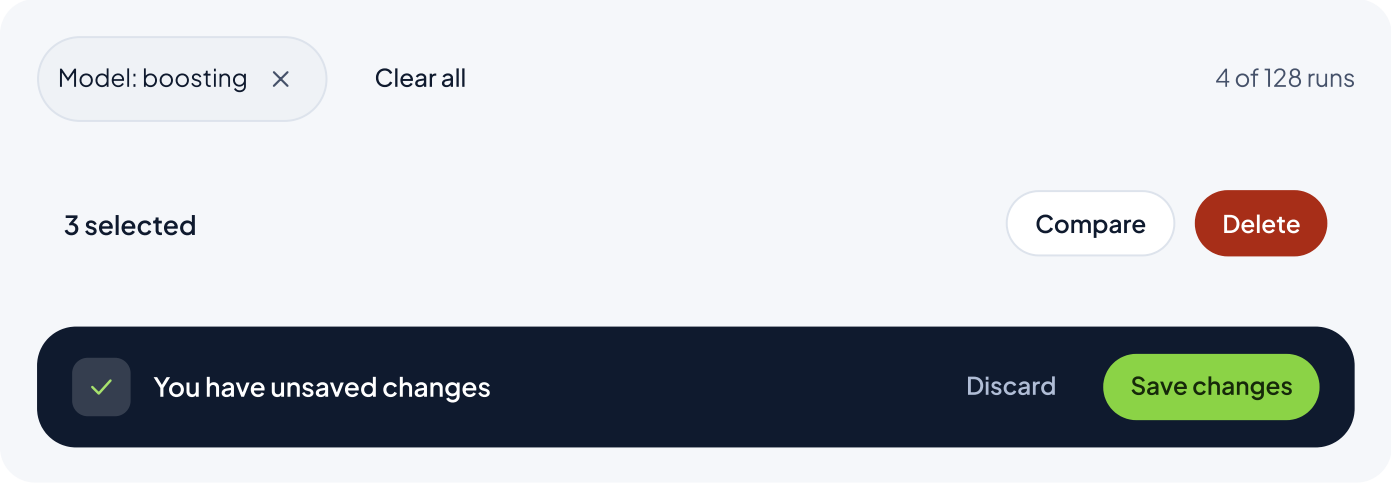


PART	CLASS
Filter bar	`.ts-filter-bar[data-labels]`, `__controls`, `__meta`, `__chips`, `__clear-all`, `__count`
List page	`.ts-list-page`, `__toolbar`, `__toolbar-start`, `__toolbar-end`, `__stack`, `__bulk`, `__bulk-count`, `__bulk-actions`, `__footer`
Save bar	`.ts-save-bar[data-sticky]`, `__icon`, `__message`, `__actions`

PROPERTY	VALUE
Filter controls	wrap, each ≥252px; data-labels=hidden for a one-line bar
Result count	12.5 secondary, pushed to the end
Bulk bar	surface-sunken, radius 16, 10 × 14 padding; count 13.5 semibold
Save bar	ink, radius 20, 14 × 18 padding, white 13.5 semibold message; sticky at the bottom of a form

Detail page, form page, dashboard link cards

The layouts of a record, of a form, and of a dashboard's shortcuts.

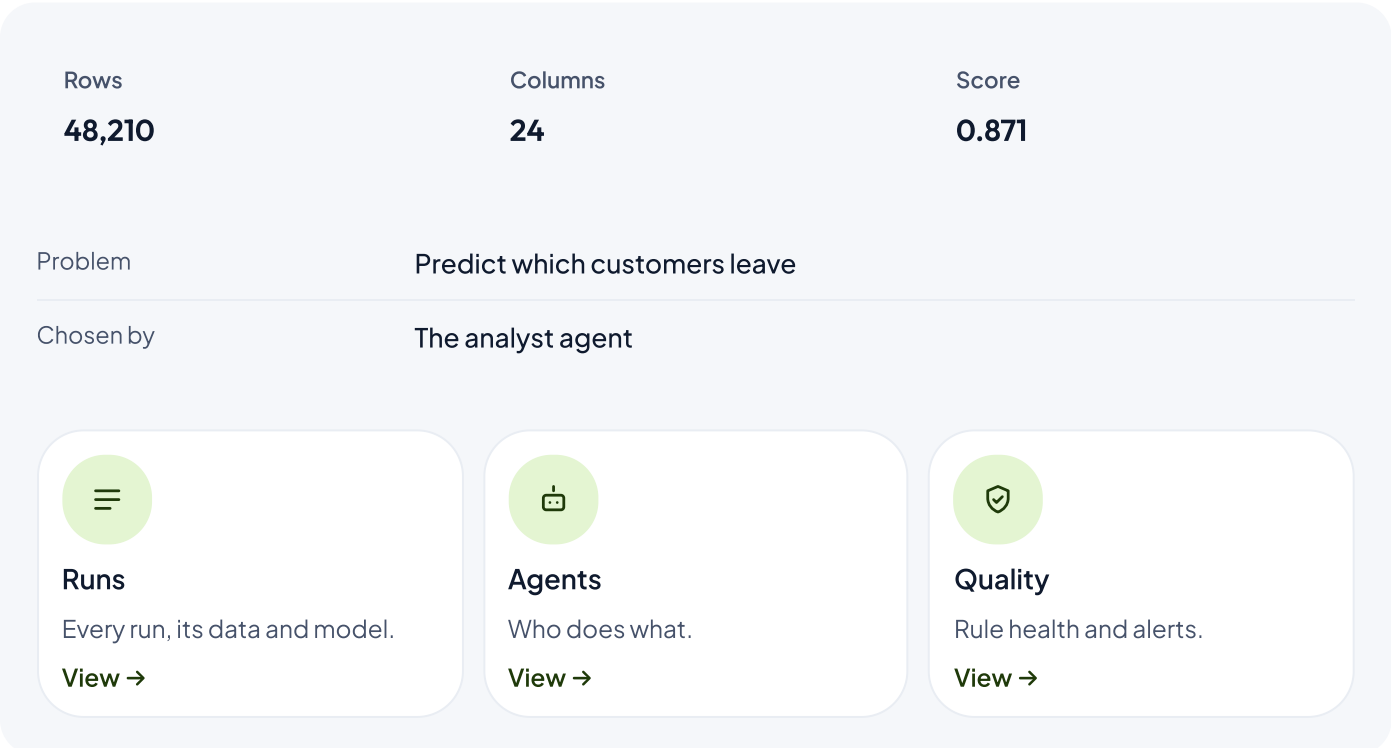

PART	CLASS
Detail page	`.ts-detail-page`, `__columns[data-has-aside]`, `__main`, `__aside`, `__facts`, `__fact`, `__fact-label`, `__fact-value`, `__list`, `__list-row`, `__list-label`, `__list-value`
Form page	`.ts-form-page`, `__layout`, `__nav-list`, `__nav-link`, `__sections`, `__section`, `__section-header`, `__section-title`, `__section-description`, `__section-body`, `__fields`
Link cards	`.ts-admin-dashboard__links`, `__link-card`, `__link-head`, `__link-icon`, `__link-title`, `__link-description`, `__link-view`

PROPERTY	VALUE
Facts	sunken tiles, radius 16, 14px padding; label 11.5 semibold; value Outfit 15.5 semibold
List rows	label / value, 180px labels from a 480px container width, hairline between
Detail columns	1.55fr / 1fr with an aside from 860px
Form page	sections with a heading and fields; a sticky section nav beside them from 960px
Link card	radius 24, 12px padding, hairline; hover accent border + hover fill; icon 46px accent-soft radius 22 accent-ink; title 14 semibold; description 12.5 secondary
Link grid	three columns, auto-fill below 60rem

8

Page patterns

TripsSource pages are built from five patterns. Start every new page from one of them.

Overview / dashboard

Page header → a stat grid of four tiles → “Needs attention” cards → a 2fr / 1fr view layout: the main panel (a table or chart) and a rail of smaller panels.

List

Page header with a primary “New” → underline or pill tabs for saved views → filter bar → data table with row actions → table footer with pagination; a bulk bar appears when rows are selected.

Detail

Page header with breadcrumbs and actions → underline tabs → facts on top, then view cards; an aside for status and people from 860px.

Form

Page header → form page with sections (title, description, fields) and a sticky section nav from 960px → a sticky save bar when something changed.

Empty and error

An empty state where the content would be, inside its panel; danger tone for a load error. Never a blank page.

BETWEEN	SPACE
Page header and the first section	22px
Sections	18–22px
Inside a panel (header to body)	14px
Tiles and cards in a grid	12px
Buttons in a row	10px

9

States, focus and motion

The same few rules for every component.

STATE	HOW IT LOOKS
Hover	a fill change only (surface-hover or row-hover); text darkens from secondary to text. Nothing moves (except pure-pagination buttons, -1px).
Focus (:focus-visible)	2px accent outline at 2px offset, plus a 6px brand-deep contour shadow; the inset contour inside lists
Current / selected	nav row: white + pill marker · child row and table row: accent-soft · tab: accent underline or ink pill · segment: white + shadow · page number: brand-deep
Disabled	opacity .55 and a not-allowed cursor; never a different colour
Invalid	danger-fg border; an error line with an icon under the field
Loading	a 26px ring (buttons: content hidden, ring centred); skeletons for content
Motion	.15s on colours, chevrons and switch thumbs; .2s on the drawer; spinners .75s; reduced motion turns spinners into pulses and stops the splash
Hit areas	checkboxes, radios and switches keep a 26px invisible hit area; every icon button is at least 34px


CONTRAST (BLUE THEME)	RATIO
White on the primary button (brand-deep)	6.7 : 1
Text on the light-green accent	8.5 : 1
Secondary text on white	7.9 : 1
Dark theme: text on the primary button	8.9 : 1
Muted text on white (placeholders, meta only)	3.9 : 1

10


The themes side by side

The same components under the three palettes. The blue theme keeps every role; the neutrals move from green-grey to cool slate; status colours stay TripsSource's.


TripsSource, original green

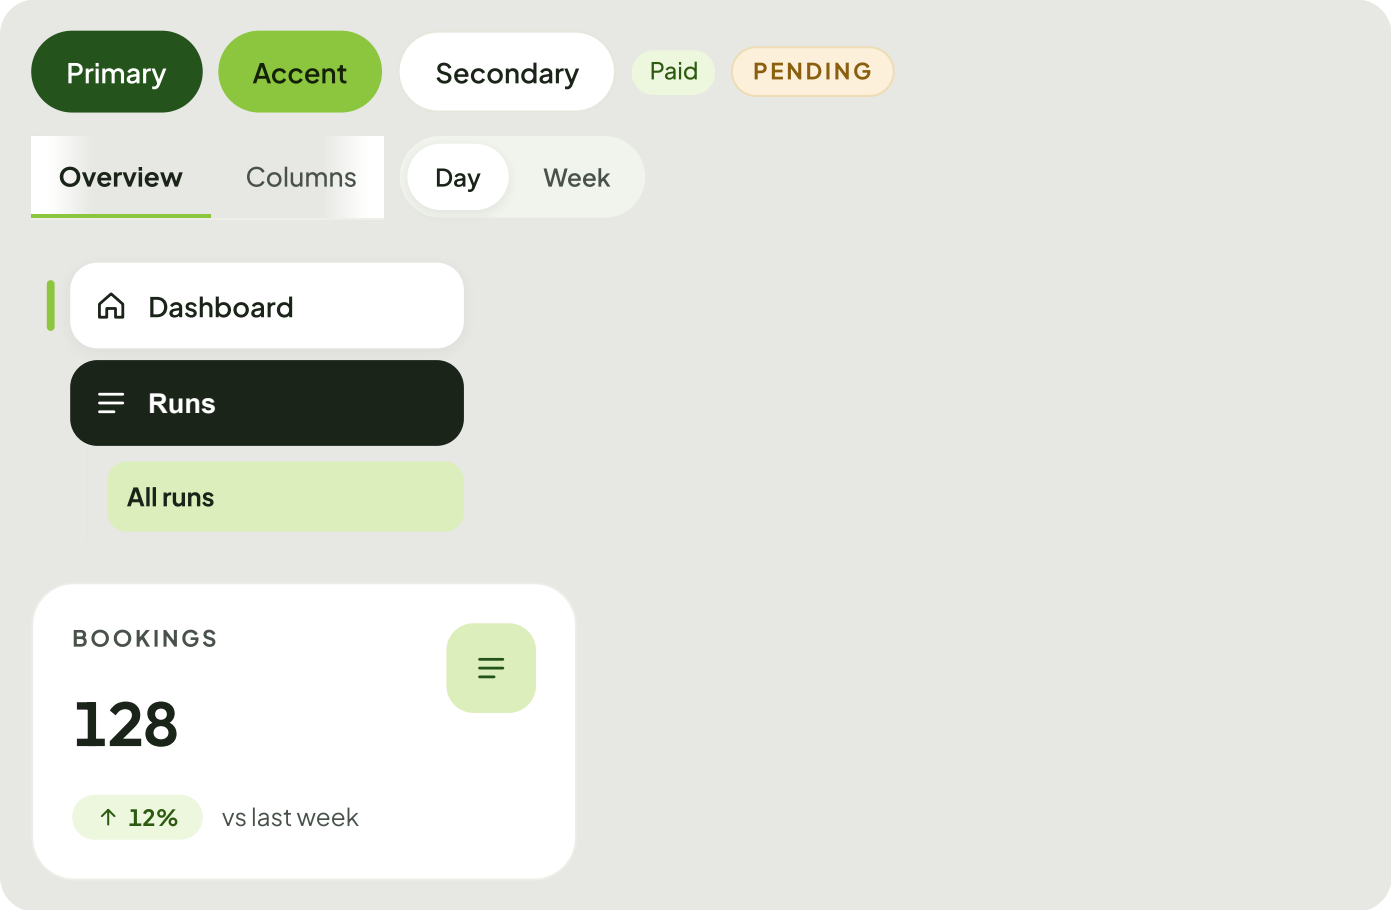

Blue and light green, light

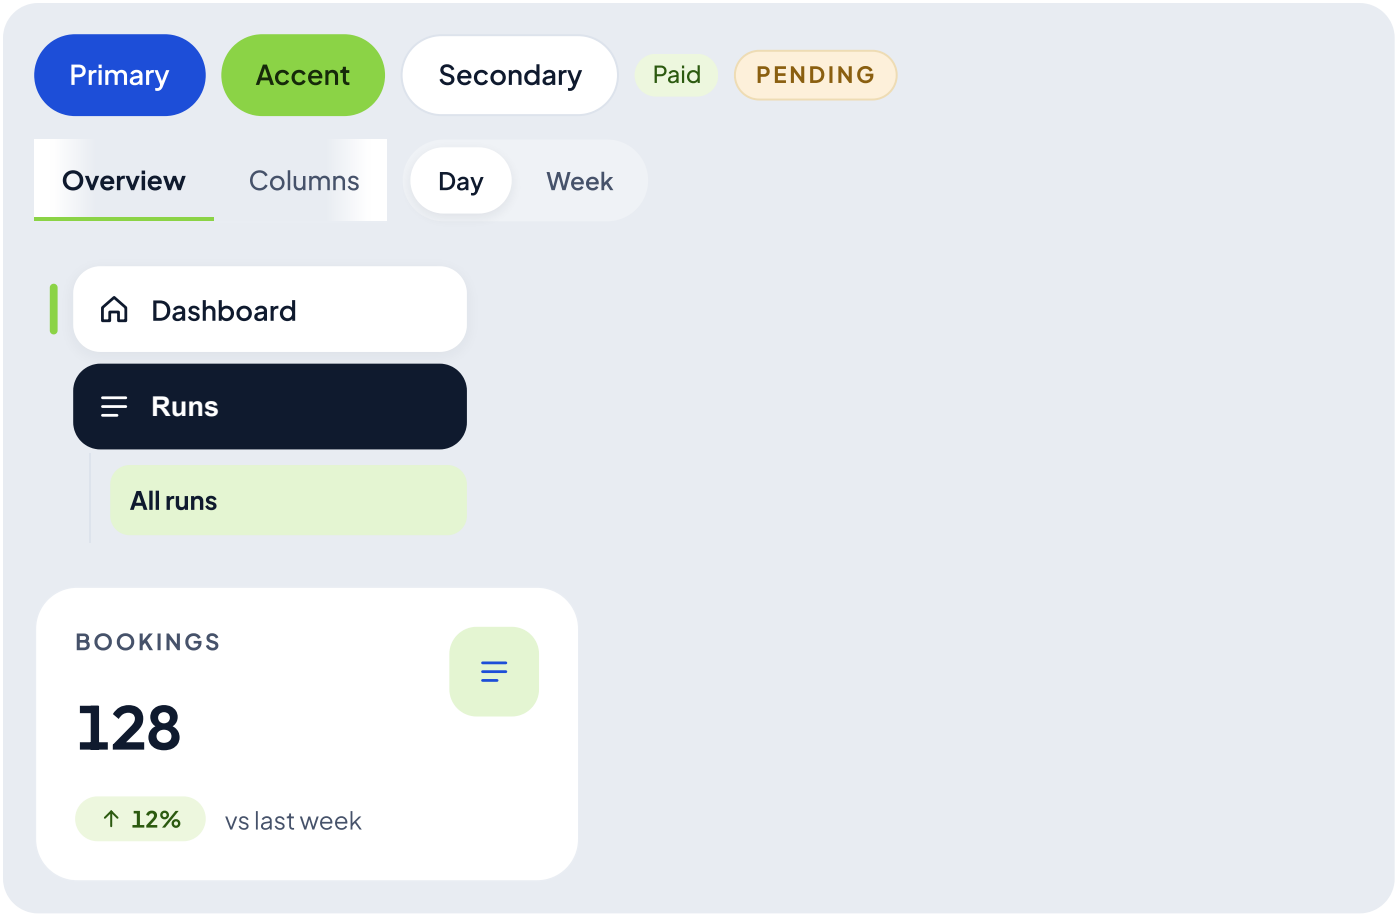

Blue and light green, dark

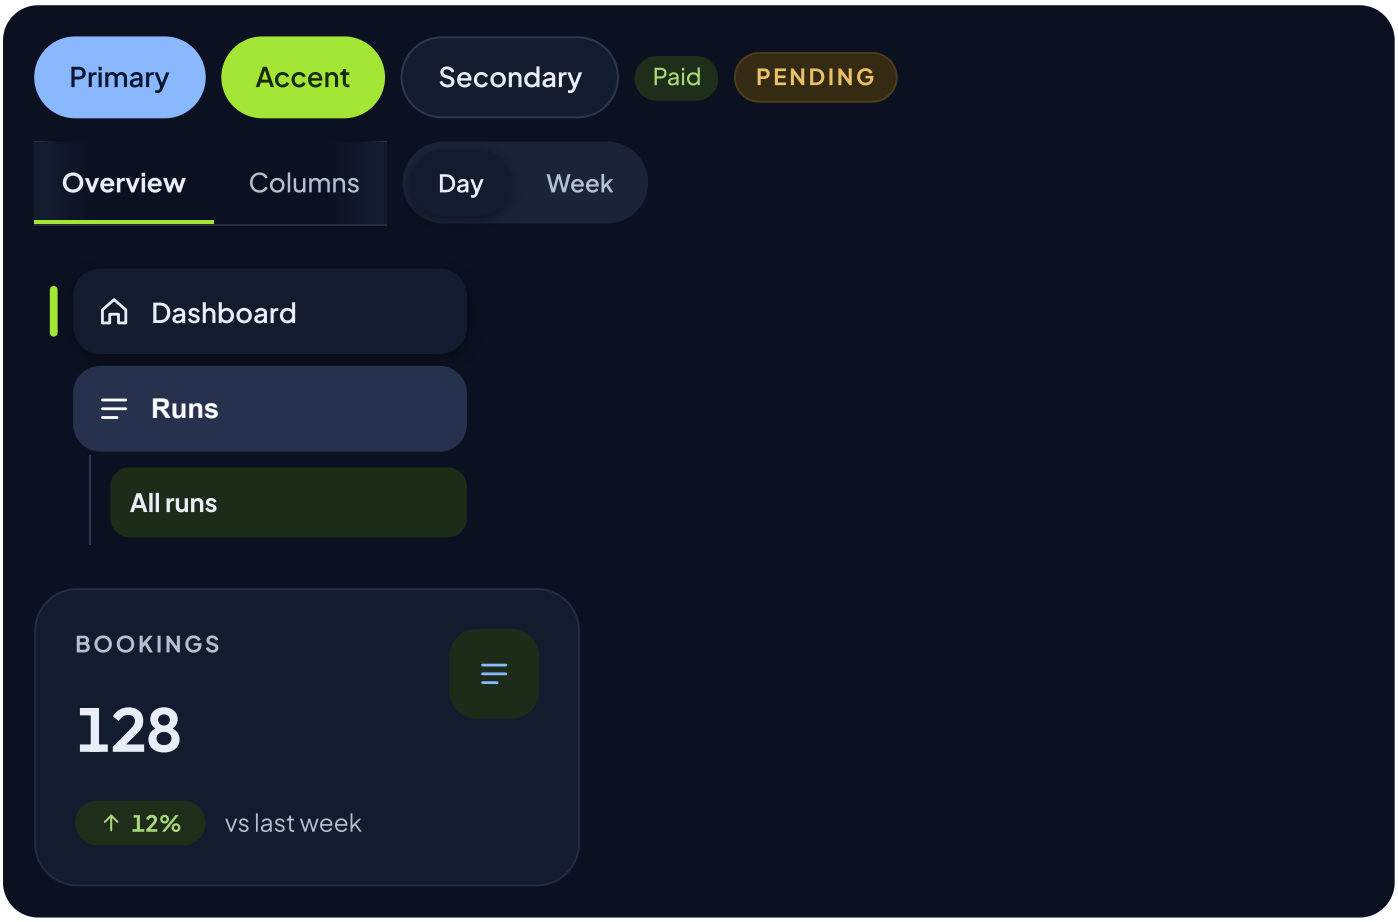

ROLE	TRIPSSOURCE	BLUE LIGHT	BLUE DARK
brand	#3f7a16	#2563eb	#5b9bff
brand-deep (primary, links)	#24541c	#1d4ed8	#8ab8ff
accent (marker, underline, focus)	#8cc63f	#8bd346	#a3e635
accent-soft (current row)	#dceebb	#e4f5d2	#1d2c19
ink (open group, pill tab, toast)	#1a2418	#0f1a2e	#26324d
ground	#e7e8e3	#e8ecf2	#0b1120
text	#1a2418	#0f1a2e	#e8edf7

Your own pair. To use other colours, override only `--ts-brand`, `--ts-brand-deep`, `--ts-brand-deep-hover`, `--ts-accent`, `--ts-accent-hover`, `--ts-accent-soft` and `--ts-accent-ink`, in light and dark, and check white on brand-deep stays above 4.5 : 1.

11

Using it in code

The kit is plain CSS, so it works anywhere. In React, wrap each component once and map props to the attributes.

```
// app/layout.tsx (Next.js)
import '@/design/ts-tokens.css';
import '@/design/ts-theme-blue.css';
import '@/design/ts-components.css';
import { Outfit, Plus_Jakarta_Sans } from 'next/font/google';
const display = Outfit({ subsets: ['latin'], weight: ['400', '500', '600', '700'], variable: '--ts-font-
display' });
const body = Plus_Jakarta_Sans({ subsets: ['latin'], weight: ['400', '500', '600', '700'], variable: '--
ts-font-body' });
// <html data-ts-reset className={`${display.variable} ${body.variable}`}>

// components/Button.tsx
type Props = { variant?: 'primary' | 'accent' | 'secondary' | 'danger' | 'ghost'; size?: 'sm' | 'md' |
'lg' } & React.ButtonHTMLAttributes<HTMLButtonElement>;
export function Button({ variant = 'secondary', size = 'md', ...p }: Props) {
  return <button className="ts-button" data-variant={variant} data-size={size} {...p} />;
}

// components/Badge.tsx
export const Badge = ({ tone = 'neutral', caps, children }: { tone?: string; caps?: boolean; children:
React.ReactNode }) =>
  <span className="ts-badge" data-tone={tone} data-caps={caps || undefined}>{children}</span>;
```

TOPIC	ADVICE
Tailwind	Keep the kit classes for components; map tokens in theme.extend for one-off layout, e.g. `colors: {{ brand: "var(--ts-brand)", ink: "var(--ts-ink)" }}`, `borderRadius: {{ card: "var(--ts-radius-card)" }}`.
Icons	18px line icons, 1.9 stroke, round caps and joins, currentColor. Lucide matches at `size={{18}} strokeWidth={{1.9}}`.
Dark mode	Set `data-ts-theme` on <html> from a Light / Dark / System control (the colour-mode component); remove it for System.
Charts	Use `--ts-chart-1` … `-8` in order; gridlines in border, labels in text-secondary 11.5.
Files	Copy the whole `design/tripssource-kit` folder. The README has the same spec as text; `example.html` shows every component live; `pdf/build.py` rebuilds this PDF.